

**TOWN OF DERUYTER**  
**735 UTICA STREET**  
**PO BOX 394**  
**DERUYTER, NEW YORK 13052**  
CODE ENFORCEMENT OFFICE  
315-852-9650 (Thursday 9:30 – Noon)

Permit # _____
Fee: \$ _____

**Solid Fuel Burning Appliances and Metal Chimneys**  
**Permit Application**

\*\*A solid fuel-burning appliance shall not share a common flue with a working fireplace nor with another solid fuel-burning appliance.

Town of DeRuyter Site Address \_\_\_\_\_

**Owner Information**

Name: \_\_\_\_\_

Mailing Address: \_\_\_\_\_

\_\_\_\_\_

Telephone: Home (\_\_\_\_) \_\_\_\_\_ Work (\_\_\_\_) \_\_\_\_\_ Cell(\_\_\_\_) \_\_\_\_\_

**Contractor Information**

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Telephone: (\_\_\_\_) \_\_\_\_\_ Fax: (\_\_\_\_) \_\_\_\_\_ E-Mail: \_\_\_\_\_

Stove Name \_\_\_\_\_ Model # \_\_\_\_\_

Test Label \_\_\_\_\_ Estimated Cost \$ \_\_\_\_\_

***Check all that apply:***

- Stove with label and installation instructions
- Used stove with no label or installation instructions
- New Manufactured metal chimney
- Heatilator

### Instructions

1. Fill out application
2. Install appliances according to manufacturer's instructions and clearance guidelines
3. If a used appliance, install with minimum clearances provided below
4. Call this office for an inspection

Masonry	
Flue Size:	
Thimble Size:	
Footing Size:	

Metal Piping			
Wall:	Single	Double	Triple
Clean-out door:	Yes		No
Height Above Roof Line:			

The undersigned certifies that the above statements and all accompanying information are true to the best of their knowledge and belief. The owner of this structure and the undersigned agree to conform to all applicable laws of the town and state, and believe the work proposed to be in compliance with all zoning regulations.


\_\_\_\_\_ (Print Name of Owner or Authorized Agent)

\_\_\_\_\_ (Signature of Owner or Authorized Agent)

\_\_\_\_\_ Date

All solid fuel burning appliances must be installed into an approved chimney, except where manufacturer's specifications allow otherwise. The vent connector pipe (single wall) must have a minimum of 18" clearance to combustibles. Some double-wall connector pipe maybe used to reduce the clearance (Check manufacturer's specifications).

All new manufactured metal chimney systems must have 2" clearance to combustibles and must have a height of 2' higher than the roof ridge. If the chimney is located further than 10' from the ridge, it must be a least 3' higher than the penetration through the roof and 2' higher than the horizontal line of roof intersection. (See Diagram)

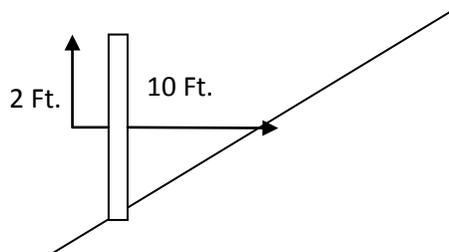

**All solid fuel burning appliances with label and installation instructions showing proper clearances to combustibles must be installed according to manufacturer's specifications. Please have these available for review by the building inspector.**

In the absence of this documentation, the stove must be installed according to the following table:

#### Used Solid Fuel Burning Appliances

	Top	Front	Back	Sides
Clearance to combustibles	36"	36"	36"	36"
Clearance to non-combustible wall protection with 1' air space			18"	18"
Concrete/masonry			6"	6"
Non-combustible floor protection (3/4" millboard min.)		18"	12"	12"

#### For Office Use Only

Inspected On \_\_\_\_\_

Stove Name \_\_\_\_\_

Location \_\_\_\_\_

Approval of Building Official \_\_\_\_\_ Date \_\_\_\_\_